

**GE Consumer & Industrial -  
Electrical Distribution**

**Current Ratings**

25A, 30A, 40A, 50A, 65A Amperes (Size C)  
80A, 100A, 125A,  
150A, 175A, 200A Amperes (Size D)  
250A, 300A,  
350A, 400A, 450A Amperes (Size DD)  
500A, 600A,  
700A, 800A, 900A Amperes (Size DDDD)

**Frequency Rating**

60 Hertz

**Current Limiting Power Fuse  
EJ0-1 Type 9F62 5.5 kV Max.**

Sizes C, D, DD, DDDD


Maximum Total-clearing Time-current Curves

Curves apply at 25°C ambient with no initial load

**GES-8135A**

**Model Numbers**

C Size	9F62HCB
D Size	9F62DCB
DD Size	9F62FCB
DDDD Size	9F62KCB

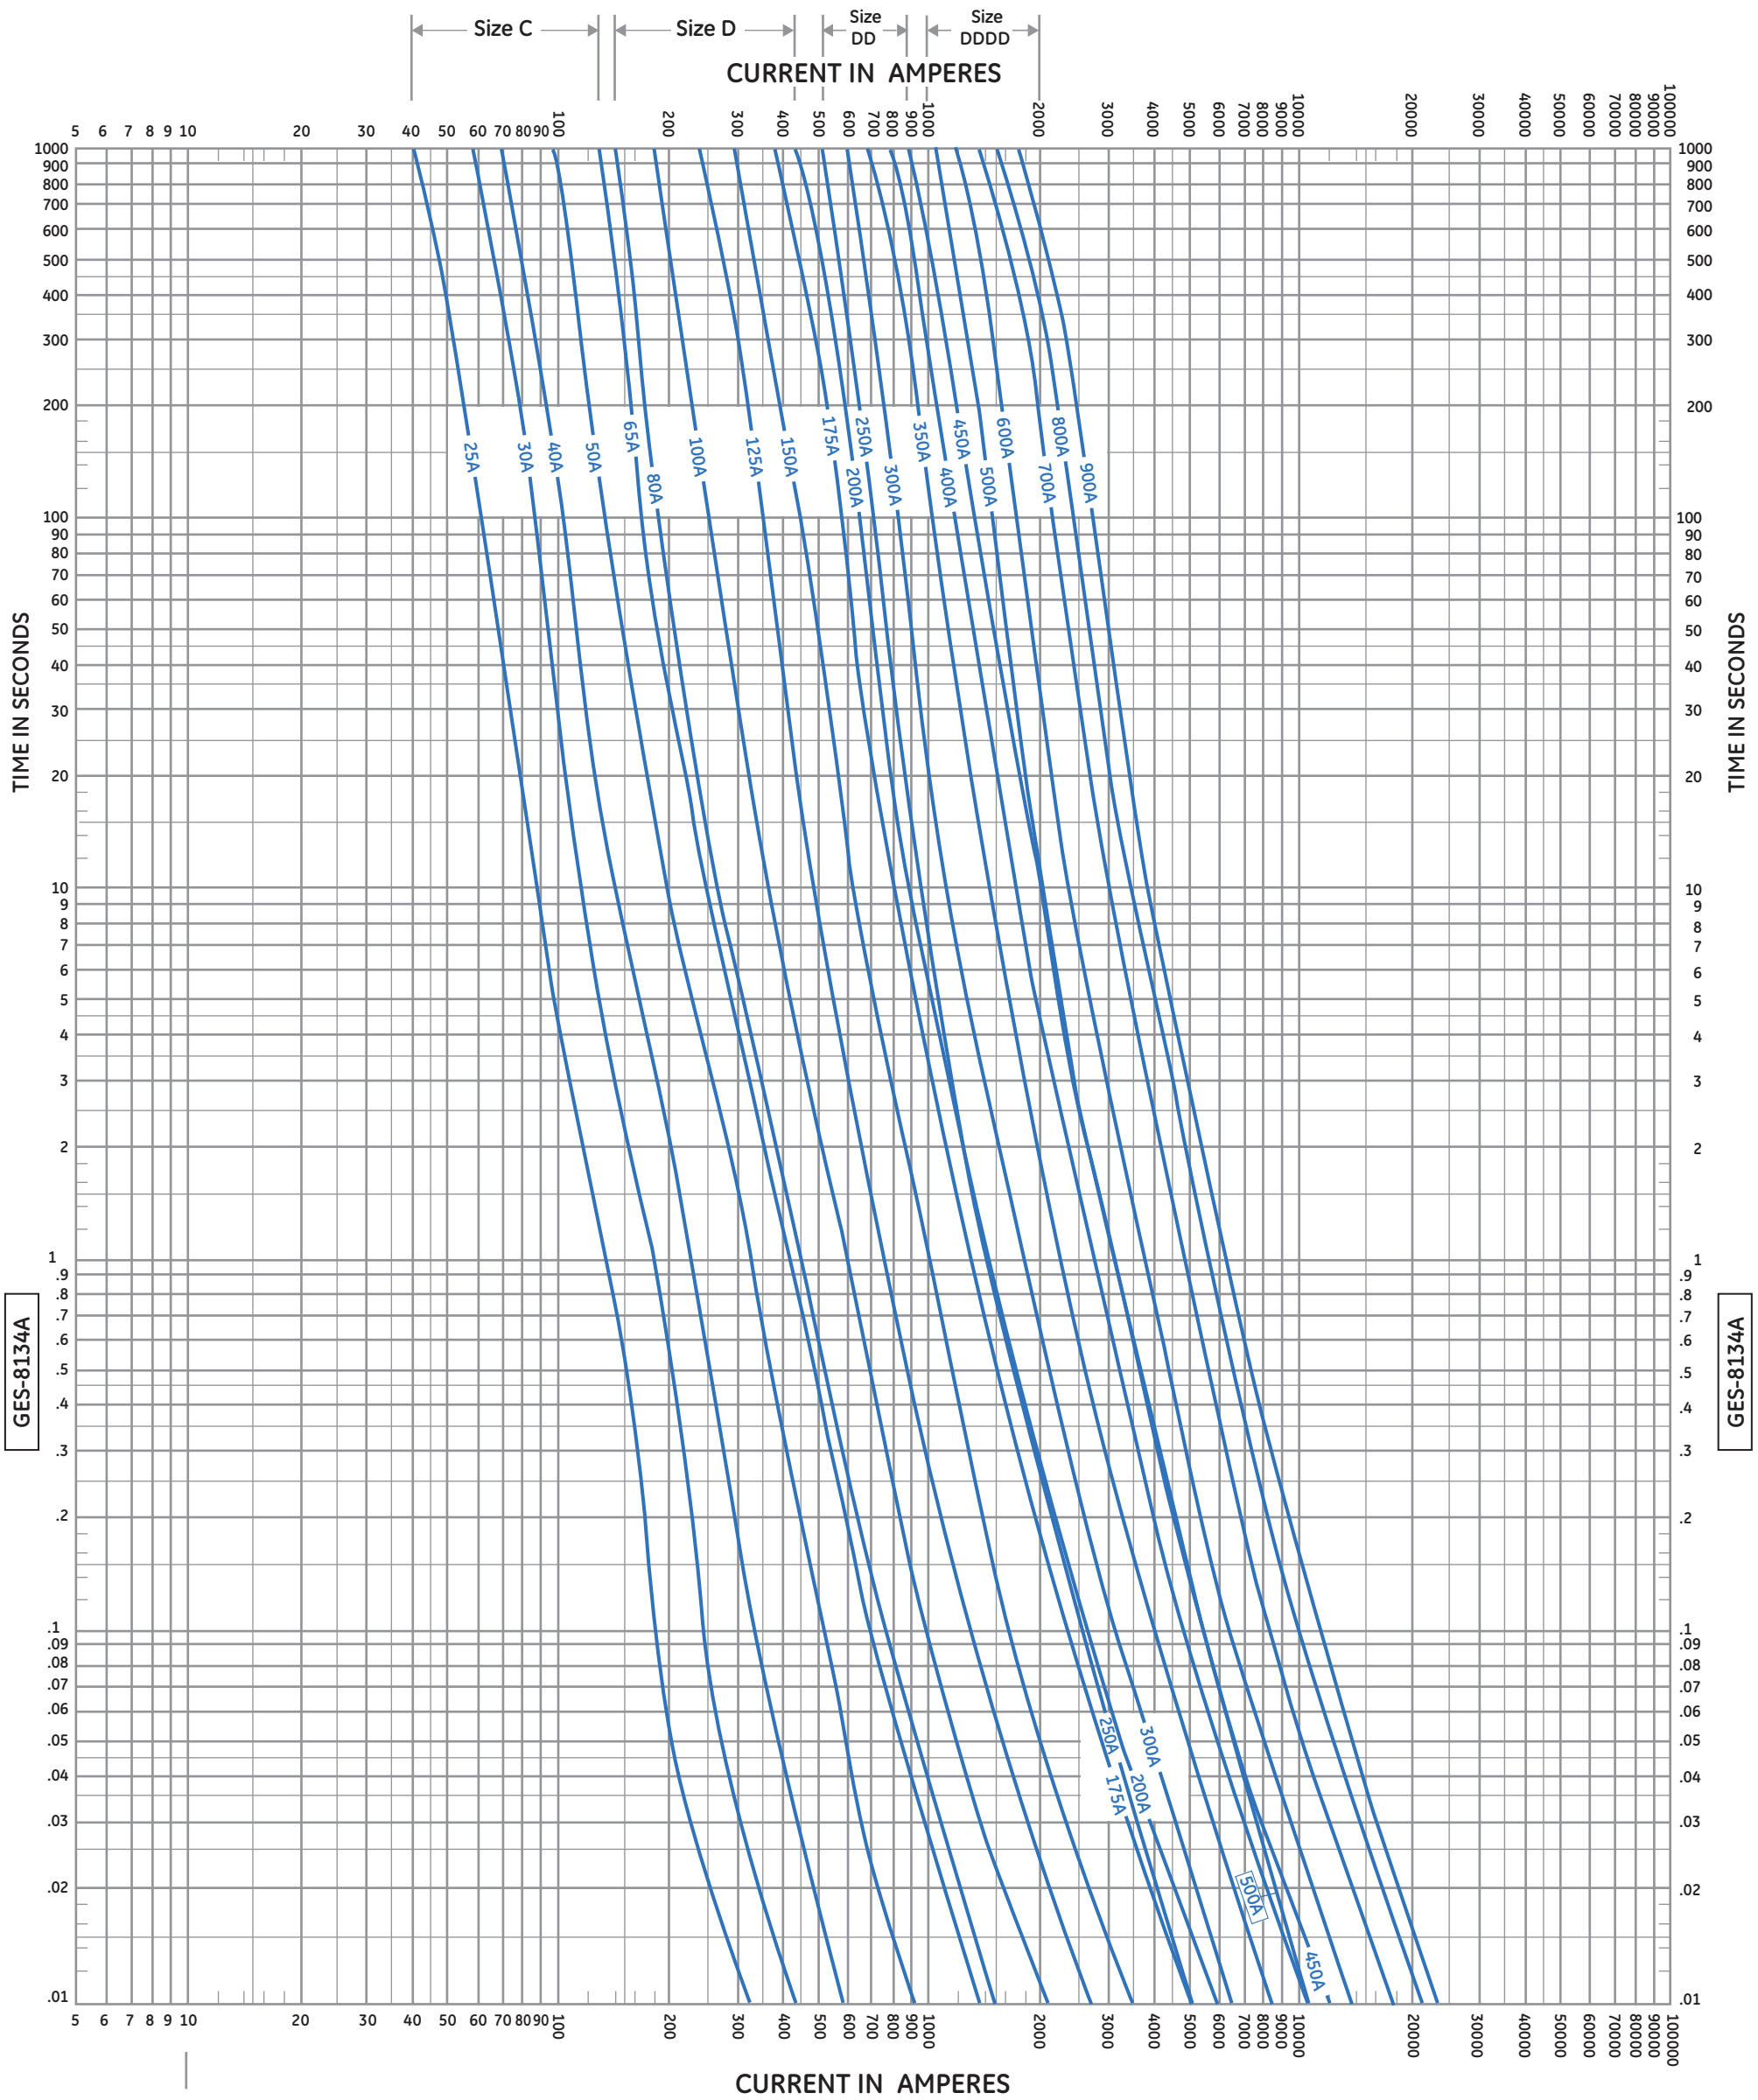

**GE Consumer & Industrial -  
Electrical Distribution**

**Current Ratings**

- 25A, 30A, 40A, 50A, 65A Amperes (Size C)
- 80A, 100A, 125A,
- 150A, 175A, 200A Amperes (Size D)
- 250A, 300A,
- 350A, 400A, 450A Amperes (Size DD)
- 500A, 600A,
- 700A, 800A, 900A Amperes (Size DDDD)

**Frequency Rating**

60 Hertz

**Current Limiting Power Fuse  
EJ0-1 Type 9F62 5.5 kV Max.**

Sizes C, D, DD, DDDD

Minimum Melting Time-current Curves

Curves apply at 25°C ambient with no initial load

**GES-8134A**

**Model Numbers**

<b>C Size</b>	<b>9F62HCB</b>
<b>D Size</b>	<b>9F62DCB</b>
<b>DD Size</b>	<b>9F62FCB</b>
<b>DDDD Size</b>	<b>9F62KCB</b>