


# Characteristics 27.6kV

Types 'DWLAX', 'DWLBX' & 'DWMBX'

Time/Current Characteristics

6 - 80 Amp


3/14

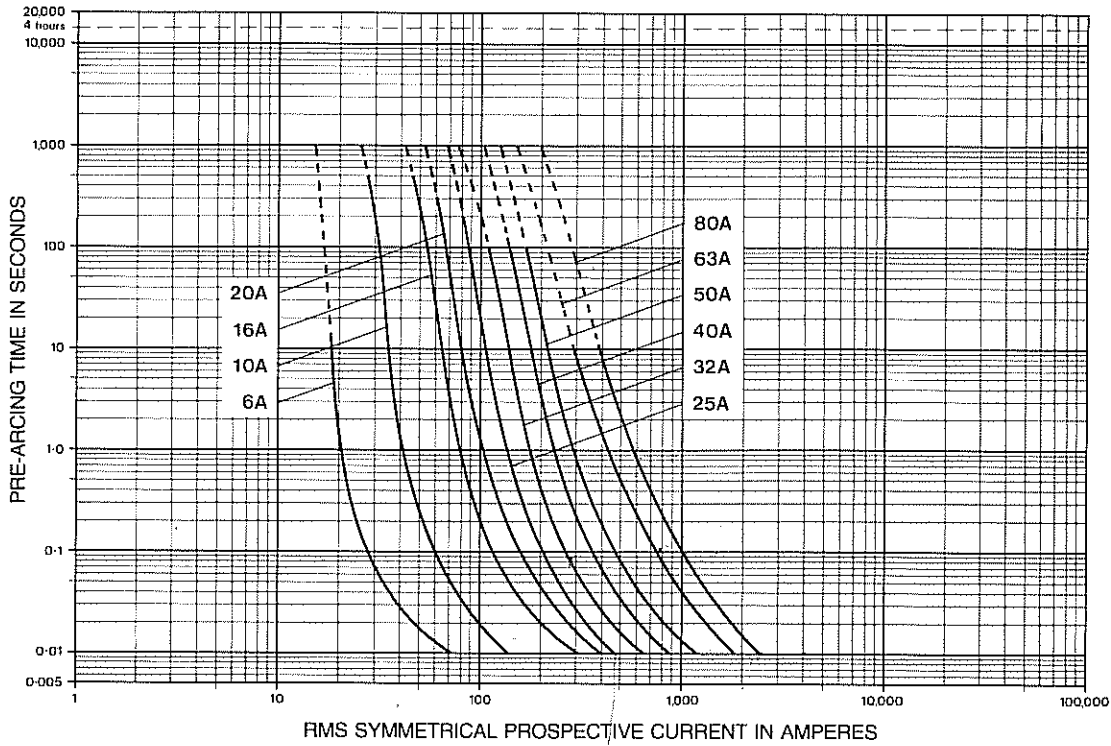

Types 'DWLAX', 'DWLBX' & 'DWMBX'

Cut-off Current Characteristics

6 - 80 Amp

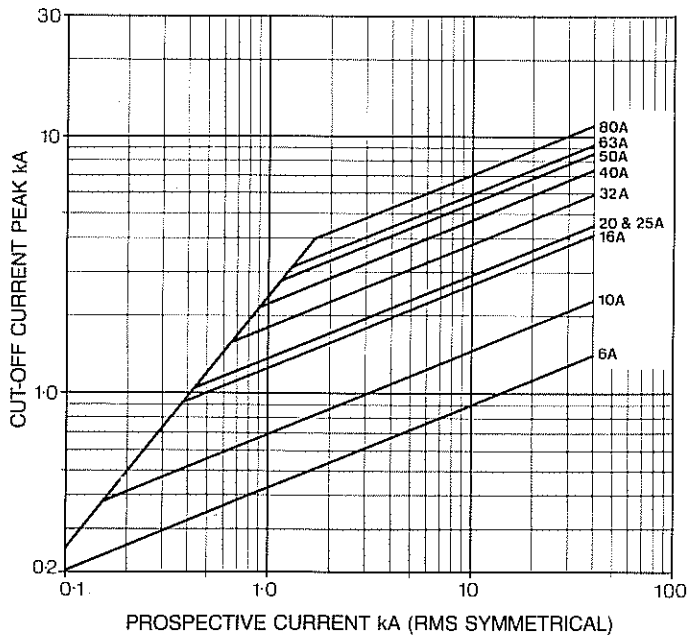

Types 'DWLAX', 'DWLBX' & 'DWMBX'

I<sup>2</sup>t Values

6 - 80 Amp

Current rating	Pre-arcing I <sup>2</sup> t	Total I <sup>2</sup> t
Amp	A <sup>2</sup> sec x 10 <sup>3</sup>	A <sup>2</sup> sec x 10 <sup>3</sup>
6	0.04	0.2
10	0.18	1.0
16	1.0	7.0
20	1.5	9.2
25	1.0	8.0
32	2.0	14.5
40	4.0	29.0
50	6.0	48.0
63	8.5	68.0
80	15.0	111.0